



Engineered and supported
by people you trust



TOUCHSTONE Stand-Alone LED Light Control System

NuWhirl's TOUCHSTONE stand-alone light control is the power supply solution for our luminous and cost-effective RGB LED lights (CICL-297). Activate this flexible control system through an electronic keypad, with a manual air switch, or as part of a more personalized configuration.

Features and Benefits

Beautiful, Affordable Illumination Powers NuWhirl's brilliant, cost-effective RGB LEDs across a spectrum of colors.

Multiple Lighting Settings Provides a selection of lighting scenes from rainbow to individual colors in various timing sequences.

Power for Bright, Wide-Angle Lights Works with NuWhirl's LEDs to offer outstanding luminosity that reaches every part of the bathtub.

Flexible Activation Supports multiple options including customizable electronic keypad and manual air switch.

Auxiliary Power On/Off Allows for activation using alternative controls, such as light switches and remotes.


Small Installation Footprint Offers easy installation in tight spaces thanks to its compact size and integrated mounting feet.

Instant Service Product in stock. No minimums. Expedited order processing available upon request.

Exceptional service support: TOUCHSTONE Controls are supported by the best engineering, sales and customer care in the Whirlpool Bath industry.



Engineered and supported
by people you trust

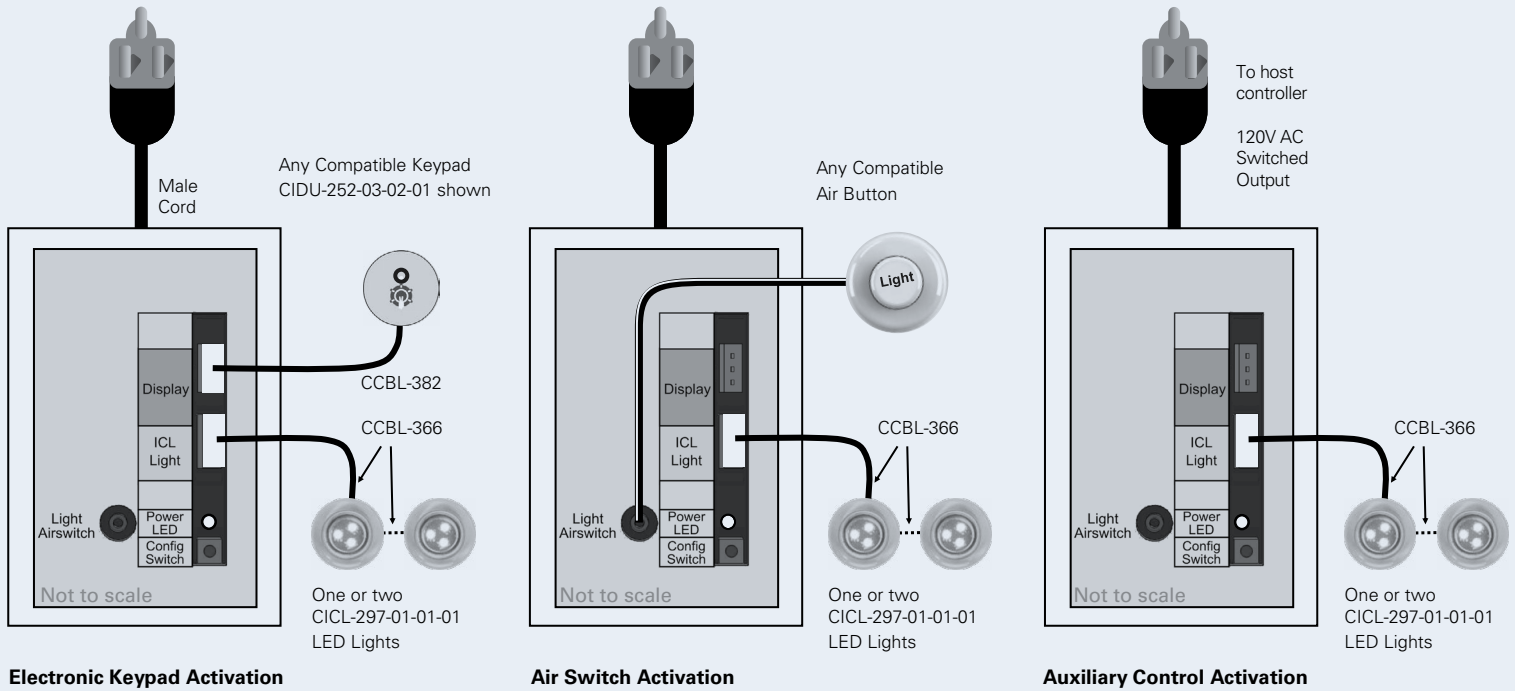

LED Light Control System Installation Instructions

Ordering

CILA-306-01-01-01	LED Light Control
CICL-297-xxx	LED Multi-Color Light
CCBL-366	LED Light Cable

Optional Controls

CIDU-xxx	Addressable Displays (keypad activation)
CCBL-382	Addressable Displays Cable (keypad activation)
AB-XX	Air Button (air switch activation)
500105	Air Switch Tubing (air switch activation)

Installation

Mounting – Bottom end tabs with screw holes.

Special Installation Notes

Fastened to tub platform, plugs into NEMA 15A GFI-protected receptacle.

Specification

Dimensions: 6-13/16" L x 2-3/8" W x 3" H

Electrical Ratings

Input: 120 VAC 60 Hz. 2A. Max.

Load: For Connection To NuWhirl Corp.

Low-Voltage Tub Lights Only.

Low Voltage Output: 15VDC 0.2A Max.

UL Recognized Component

For information on NuWhirl Instructions, see:

nuwhirl.com/docs/product-instructions.html



contact us to learn why we are the industry's preferred jetted tub supplier

nuwhirl.com | 951 817 5600 | 2066 California Avenue, Corona, CA

10/2015