



*Engineered and supported
by people you trust*



TOUCHSTONE™ Master Bath Control

NuWhirl's TOUCHSTONE Master Bath Control is the industry's **only** integrated solution for feature-rich walk-in and conventional tubs. This intelligent electronic control system can simultaneously operate two loads totaling 15 amps, high-intensity LED tub lights, conductive water detection, and surface heaters with temperature display.

Features and Benefits

Cost-Effective Solution Eliminates the need for and expense of multiple control boxes, additional wiring, and external power supplies.

Flexible Controls a variety of systems, such as pumps, variable-speed blowers, conductive water detection, and LED bathtub lights, all powered from a single NEMA 5-15P plug.

Load-Limiting Interlock Logic Automatically limits the combined loads to a maximum of 15 amps (for configurations that include multiple high-power loads such as hydro massage and micro bubble pump systems.)

Expandable Integrates with other TOUCHSTONE controls.

Large Power Supply Supplies both the unit and 24-volt bath surface heaters (up to 96 watts).

Operates by Air Switch or Keypad Supports any combination of up to three air switches and single- or multi-button electronic keypads.


Customized Software configurations using the same control.

Immediately Available Product in stock. No minimums. Same-day shipping available.

Exceptional service support: TOUCHSTONE Controls are supported by the best engineering, sales and customer care in the Whirlpool Bath industry for over 25 years.



Engineered and supported
by people you trust

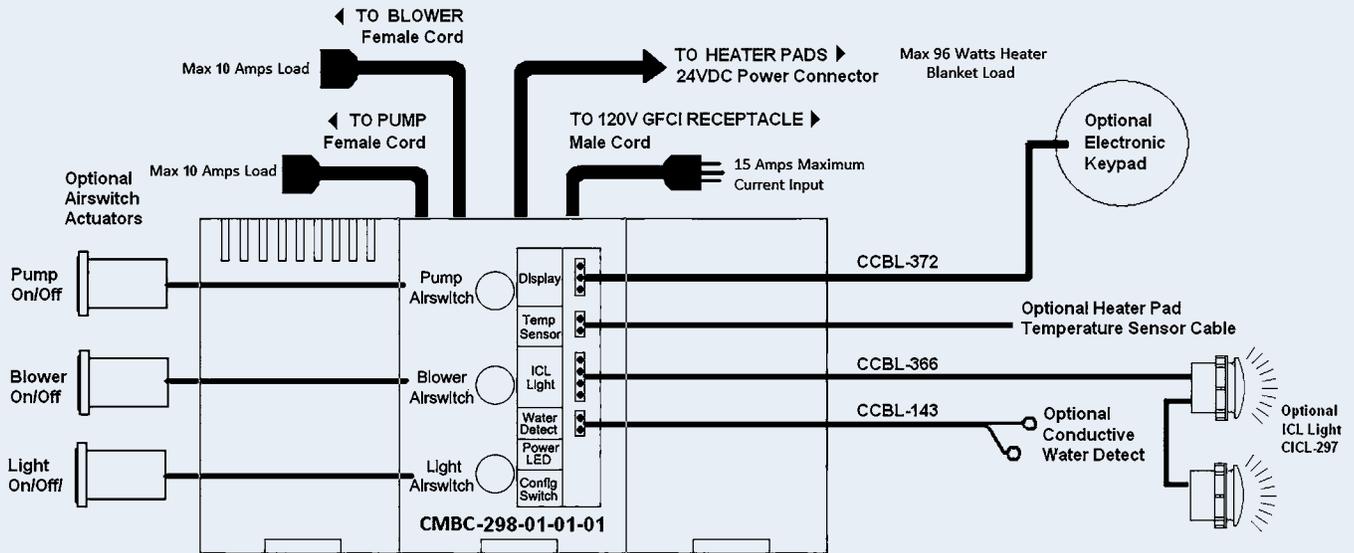

CMBC-298

Ordering

CMBC-298-01-01-01 Master Bath Control, On/Off & Variable Loads, Surface Heater, Temperature Feedback, Light, Water Detect, Air Switch and/or Keypad Actuated

Installation

Mounting

Bottom tabs with screw holes on both sides

Special Installation Notes

Fastens to tub platform, plugs into a standard under-tub 15A NEMA receptacle

Compatible With

Standard Air Switch Actuators

- CICL-297-xxx** LED Light
- CCBL-366** LED Light Cable
- CCBL-xxx** Conductive Water Detect Cable
- CIDU-xxx** Addressable Displays
- CCBL-372** Addressable Display Cable

Specifications

Dimensions 6-13/16" L x 6-11/16" W x 5" H

Electrical Rating 15 Amps, 125 Volts AC, 60 Hz.

Controls Single Speed pump (10 Amps max.) and Variable Speed Blower (10 Amps max.) loads, through two NEMA receptacle power cords. Also controls Surface Heaters, 24V at 4 Amps max (96W.)

Can operate one CICL-297 Color LED Light, connected using CCBL-366.

Accepts Conductive Water Detect cable

Operated by multiple single or fewer multi button displays or three air switches or combinations of the above, for Load x3 and Light control.

Provides for selectable configurations offering unique operating parameters for pumps, blowers, special run timers, interlocks, etc.



contact us to learn why we are the industry's preferred jetted tub supplier

nuwhirl.com | 951 817 5600 | 2066 California Avenue, Corona, CA

8/2014